



## 36" COUNTER DEPTH FRENCH DOOR REFRIGERATOR

BRFD2230XSS



### KEY FEATURES

- Duo Cycle Frost Free Cooling
- Blue Light Technology
- IonFresh
- Inner Digital Display
- Large Pantry Drawer
- Interior Filtered Water Dispenser
- Interior Theater Lighting with LED Lights

### GENERAL

Type	Freestanding
Style	Counter-Depth French Door
Finish	Fingerprint-Free Stainless Steel with Finished Gray Sides
Metal Back Wall	—
Cooling System	Duo Cycle Frost Free Cooling
Control System	Electronic Controls
Control Display Type & Location	Digital LED Display on Front Top Trim
Connectivity	—

### CAPACITY

Total Net Volume	20.5 cu. ft.
Fresh Food Net Volume	13.77 cu. ft.
Freezer Net Volume	6.73 cu. ft.

### PERFORMANCE

Fresh Food Temperature Range*	33°F to 46°F
Freezer Temperature Range*	-8°F to 5°F
Environment Temperature Range	Operates in Temperatures Between 32° F and 110° F
Freeze Guard	Yes, Freezer Operates in Temperatures as Low as 5°F
Modes	On/Off Power, On/Off Icemaker, Temperature Control, Water Filter Reset, Quick Freeze, Vacation, Sabbath, Quick Cool, Economy
Compressor	Variable Speed VCC
ENERGY STAR® Certified	Yes
Annual Energy Consumption	625 kwh/year

### FRESH FOOD FEATURES

Internal Filtered Water Dispenser	Yes, Concealed
Water Filter with Alert (6 Months)	Yes
Crispers	2 – Humidity Controlled
Blue Light™ Crispers	Yes
Full-Width Deli Drawer	Yes
Shelves	4 – Full-Depth, Safety Glass (4 Adjustable)
Total Number of Door Bins	6
Gallon-Sized Door Bins	2
FlexiLift™ Door Shelves	Yes
Dairy Compartment	Yes
Egg Tray	Yes
Odor Control Technology	Yes
Sabbath Mode	Yes
Eco-Mode	Yes
Door Open Alarm	Yes
Interior Illumination	LED – Side Walls and Ceiling

\* Actual temperatures may vary with environment and other factors



## 36" COUNTER DEPTH FRENCH DOOR REFRIGERATOR

BRFD2230XSS

### FREEZER FEATURES

Freezer Configuration	Drawer
Freezer Drawers / Baskets / Bins	1 Drawer, 1 Ice Drawer, 1 Deep Bin with Removable Tray
Freezer Interior Illumination	Yes
Automatic Ice Maker	Turbo, Makes up to 11 lbs./Day
Auto Defrost	Yes

### TECHNICAL INFORMATION

Volts / Frequency	120 V / 60 Hz
Rated Current (A)	2.7 A
Min. Circuit Breaker Size	15 Amp
Sound Level	35 dBA
Refrigerant Type	R600a
Plug Type	NEMA 3-Prong
Power Cord Length	6 ft.


### DIMENSIONS & WEIGHTS

Product (H x W x D) (in)	69 <sup>3</sup> / <sub>4</sub> x 35 <sup>3</sup> / <sub>4</sub> x 28 <sup>7</sup> / <sub>8</sub>
Height With Hinge Cap	69 <sup>3</sup> / <sub>4</sub>
Height Without Hinge Cap	69
Depth With Handles	28 <sup>7</sup> / <sub>8</sub>
Depth Without Handles	26 <sup>3</sup> / <sub>4</sub>
Depth Without Doors	23 <sup>5</sup> / <sub>8</sub>
Carton (H x W x D) (in)	73 <sup>11</sup> / <sub>16</sub> x 38 <sup>1</sup> / <sub>2</sub> x 30 <sup>11</sup> / <sub>16</sub>
Product Weight (lbs)	298
Shipping Weight (lbs)	341.7


# 36" COUNTER DEPTH FRENCH DOOR REFRIGERATOR

BRFD2230XSS

All measurements in inches (mm)

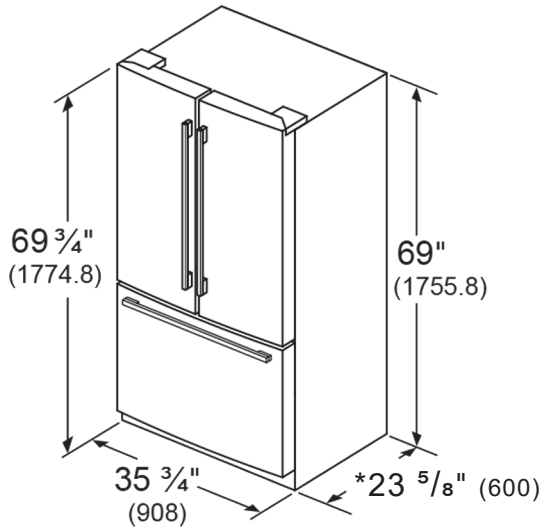


## Side View

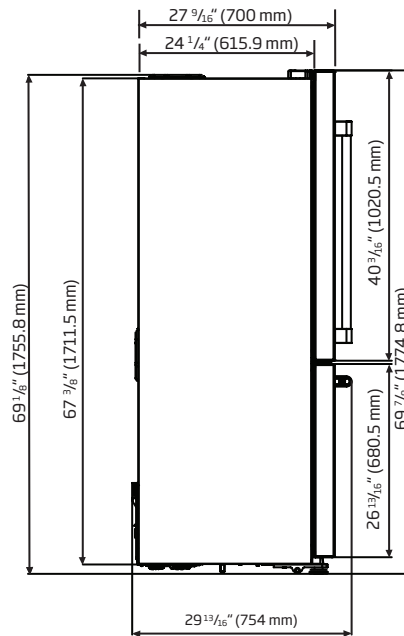


\* Add 1-15/16" (49mm) in the back measurements for proper ventilation

## Top View

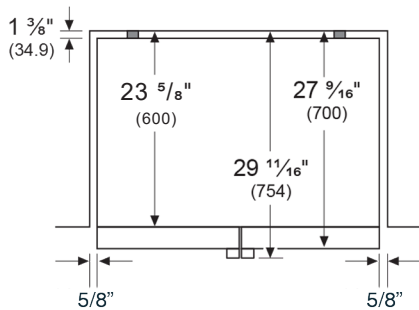


## Top View

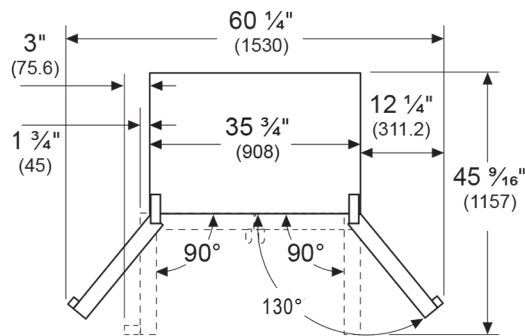


Drawers can be pulled out with door open to 90°. Drawers can be taken out with door completely opened.


## Electrical

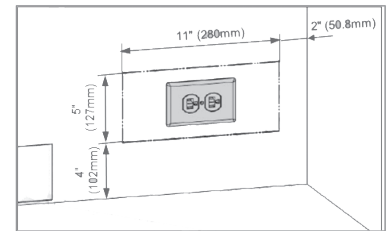

## Plumbing

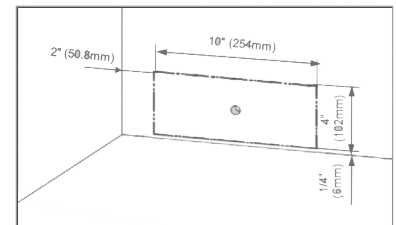

measurements in inches (mm)

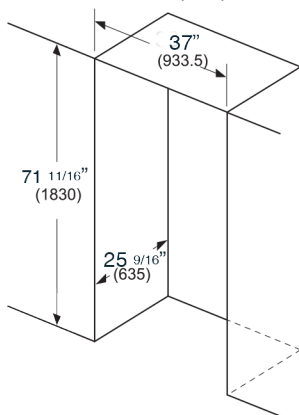

Leave 2" (50.8) gap at the top and 1 3/8" (34.9) behind the refrigerator for proper ventilation.

It is recommended that you do not install the refrigerator near a heat source such as a stove or a range.

## Required Minimum Clearances:

Top: 2"

Sides: 5/8" on each side

Back: 1 3/8"

NOTE TO THE INSTALLER: All height, width, and depth dimensions are shown in inches (as well as metric). Beko U.S., Inc. reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Please visit our website at [www.BlombergAppliances.com](http://www.BlombergAppliances.com) or call 888.352.2356 to verify the latest specifications with final dimensional data and other details prior to installation and making a cutout. Applicable product limited warranty information may be found in accompanying product materials, or you may contact your account manager for further details. Proper installation is the responsibility of the installer. Product failure due to improper installation is not covered under the Limited Warranty.